



ET18

Tracked Conventional Tail Excavators



ET18 – The evolution of your working world.

Wacker Neuson sets new standards for compact excavators with its new generation of models in the 1.7 through 2.4 t class. Tried and tested innovations are retained and combined with completely new development approaches. The result: A comprehensively renewed machine class right down to the finest details, which promises greater efficiency and performance.

- Innovative, newly designed cab: The redeveloped cab of the ET range sets new standards in terms of clear layout, safety and user comfort with its completely redesigned interior.
- Powerful and efficient performance: The big diesel engines and new, innovative hydraulic system set new standards of operation.
- Maximum connection facilities with up to 4 auxiliary control circuits: Up to 4 additional control circuit options are available ex-works for all models of the ET range.
- Every ET model has its own, optimized undercarriage to guarantee maximum stability and superior drive characteristics in tough everyday conditions.
- Every ET model has its own, optimized boom system with different dipper stick lengths: Thanks to the strong boom system with a choice of two optional dipper stick lengths, every machine achieves maximum digging strength and excavation values.



Technical specifications

Operating data

Shipping weight min.	1,610 kg
Operating weight min.	1,745 kg
Biting force max. (ISO 6015)	11.59 kN
Breakaway force max. (ISO 6015)	18.6 kN
Digging depth	2,100 mm
Dumping height max.	2,500 mm
Digging radius	3,800 mm
Superstructure slewing speed	10 1/min
L x W x H min.	3,800 x 990 x 2,290 mm

Engine / Motor

Engine / Motor manufacturer	Yanmar
Engine / Motor type	3TNV76
Engine / Motor	Water-cooled 3-cylinder diesel engine
Displacement	1,116 cm ³
RPM / speed	2,200 rpm
Engine performance acc. to ISO	13.4 kW
Battery Voltage	44 Ah
Tank capacity	24 l

Hydraulic system

Duty pump	Double variable pump with 2 gear pumps
Flow rate max.	73 l/min
Operating pressure for working and traction hydraulics	200 bar
Operating pressure Slewing gear	125 bar
RPM / speed Superstructure	10 rpm
Hydraulic oil tank Contents	19 l

Wheel set

Travel speed max.	5.3 km/h
Gradeability max.	58 %



Chain width	230 mm
Ground clearance Standard undercarriage	210 mm

Dozer Blade


Width	990 mm
Height	230 mm
Stroke Standard dozer blade above ground	200 mm
Stroke Standard dozer blade below ground	320 mm

Sound level

Sound level (LwA) acc. to 2000/14/EC	93 dB(A)
Cabin - specified sound pressure level LpA acc. to ISO 6394	77 dB(A)



Dimensions

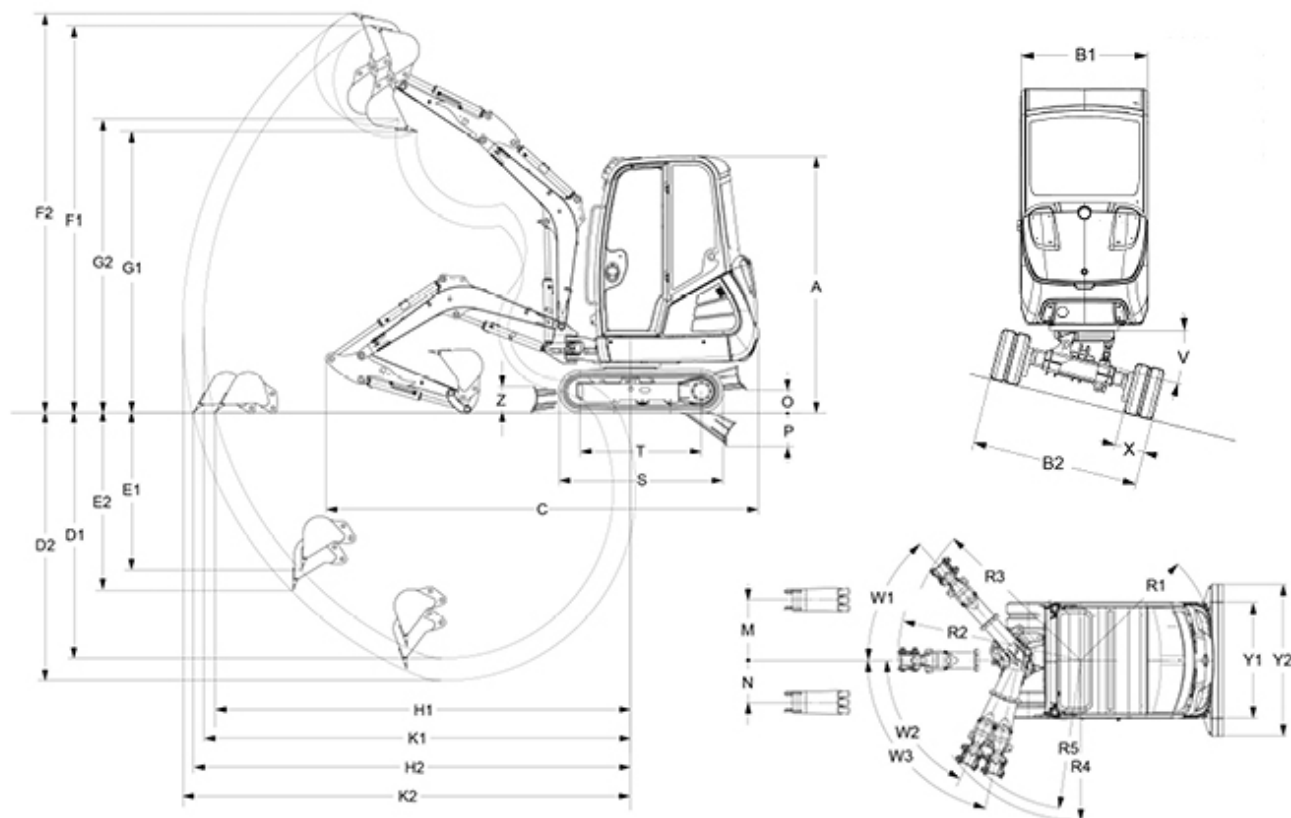

B1	Width Superstructure mm	990
B2	Width undercarriage retracted mm	990
B2	Width undercarriage extended (telescopic undercarriage only) mm	1,300
D1	Digging depth Max. (short dipper stick) mm	2,200
D2	Digging depth Max. (long dipper stick) mm	2,400
E1	Insertion depth Max., vertikal (short dipper stick) mm	1,420
E2	Insertion depth Max., vertikal (long dipper stick) mm	1,610
F1	Insertion height Max. (short dipper stick) mm	3,450
F2	Insertion height Max. (long dipper stick) mm	3,560
G1	Dumping height Max. (short dipper stick) mm	2,500
G2	Dumping height Max. (long dipper stick) mm	2,620
K1	Digging radius Max. (short dipper stick) mm	3,800
K2	Digging radius Max. (long dipper stick) mm	4,000



H1	Range Max. ,on the ground (short dipper stick) mm	3,700
H2	Range Max. ,on the ground (long dipper stick) mm	3,900
R1	Rear swivel radius Min. mm	1,160
M	Arm displacement Max. , to centre of bucket, right side mm	520
N	Arm displacement Max. , to centre of bucket, left side mm	360
O	Lift height Max., of dozer blade above ground (short) mm	200
O	Lift height Max., of dozer blade above ground (long) mm	300
P	Scraping depth Max., of dozer blade below ground (short) mm	320
P	Scraping depth Max., of dozer blade below ground (long) mm	380
R2	Boom slewing radius centre mm	1,580
R3	Boom slewing radius right mm	1,500
R4	Boom slewing radius left lock mm	1,380
R5	Boom slewing radius left max. mm	1,280
S	Length Total crawler length (standard undercarriage) mm	1,460
S	Length Total crawler length (telescopic undercarriage) mm	1,605
T	Length Crawler length Sprocket wheel (standard undercarriage) mm	1,080
T	Length Crawler length Sprocket wheel (telescopic undercarriage) mm	1,225
W1	Turning angle Max. of boom system to the right °	48
W2	Turning angle Max. of boom system to the left lock °	64
W3	Turning angle Max. of boom system to the left °	77
Y1	Width Dozer blade mm	990
Y2	Width Dozer blade width with extension (telescopic undercarriage only) mm	1,300
Z	Height Dozer blade mm	230

Please note

that product availability can vary from country to country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions.

Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2015 Wacker Neuson SE.